



SUNVENT CONNECTOR VENTS - DUO

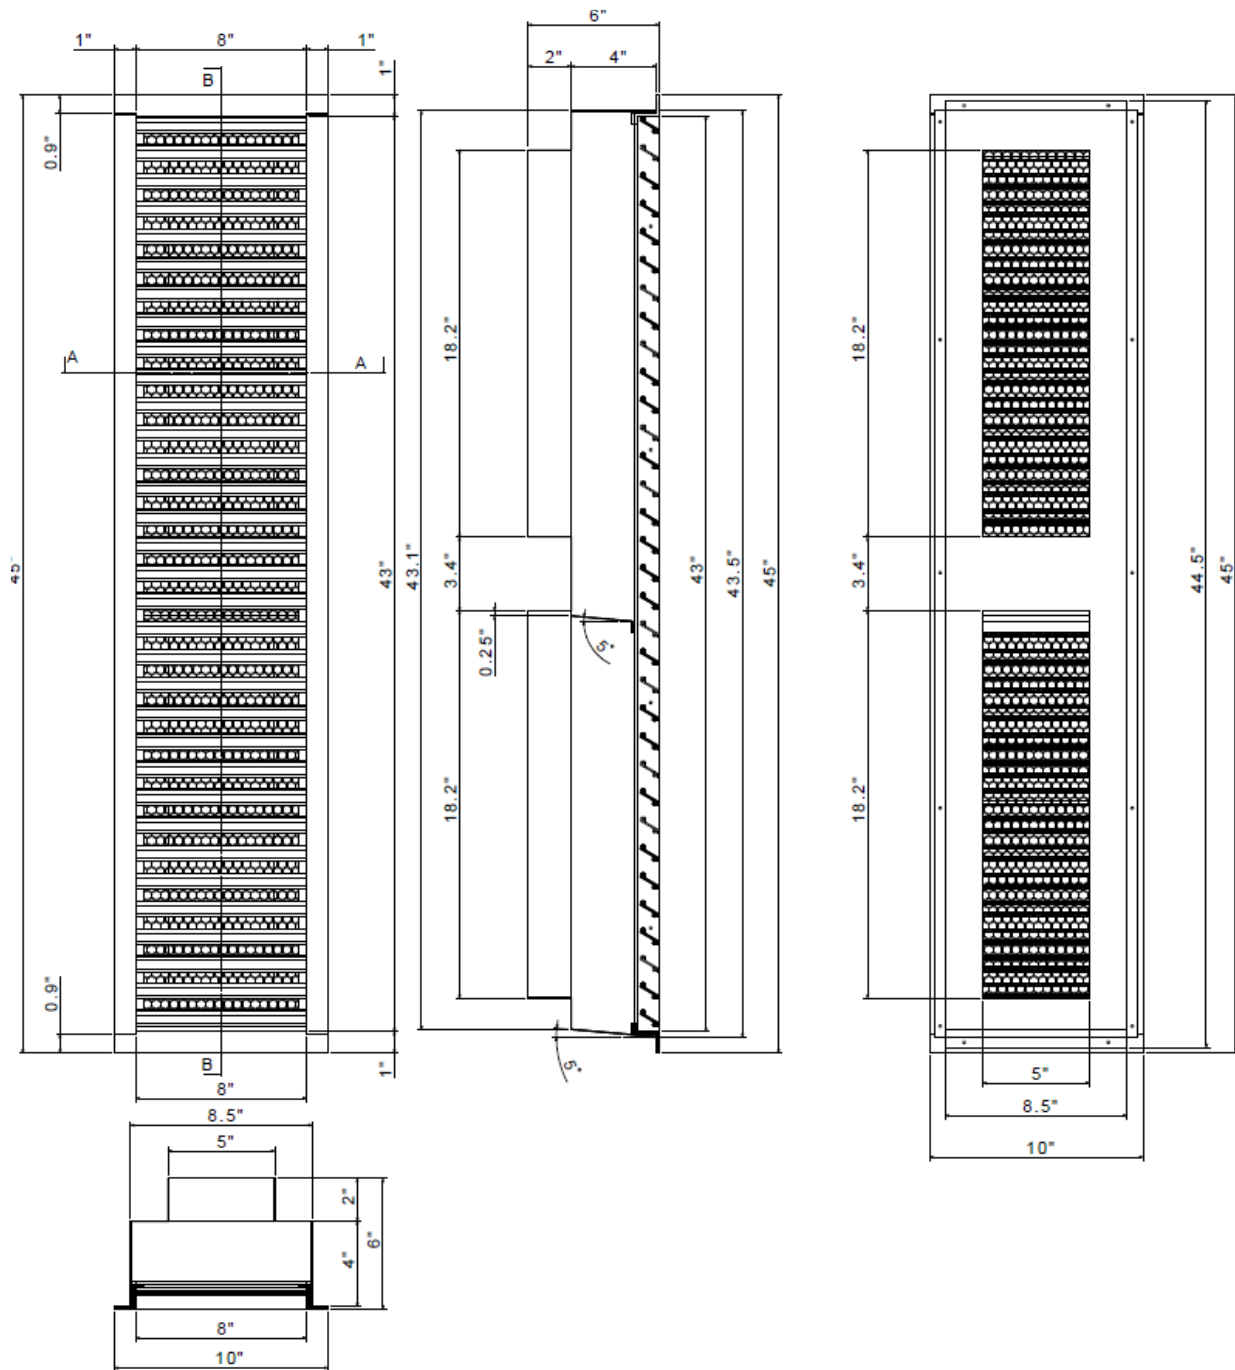

Minimum Opening Required:
8.75"W x 43.25

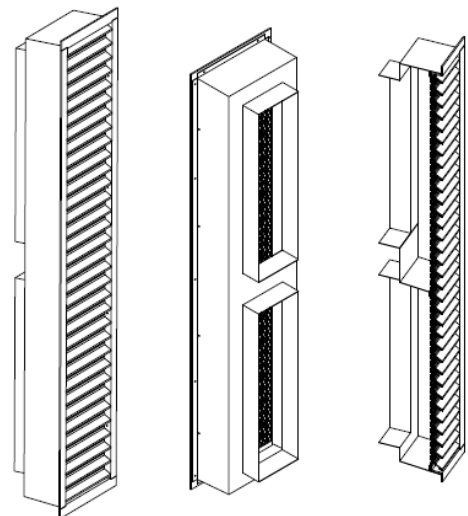

Finish:_____ **Quantity:**_____

- **VENT FRAME**: Extruded aluminum to be 6063 - T5 Alloy, Minimum .125" thick, with 1" Front Flange
- **BLADES**: Ext. alum 6063-T5, Min .063" thick, 1"D set at 30° angle, 1.25" on center
- **BOX**: 28 ga. galv. steel w/divider between rectangular collars, w/ 5° slope from back to front and ½" bend at bottom
- **SCREENS**: Aluminum Hexagon (.032 ga. 1/4" Holes on 9/32" Staggered Centers, 79 % Open Area)
- **UL RATING**: NONE

SUNVENT INDUSTRIES
div of SYLRO SALES CORP.
1 Industrial Drive, #26
Pelham NH, 03076
Ph: 603-595-4556
Fax: 603-595-4778
www.sunventindustries.com
info@sunventindustries.com

PROJECT:

LOCATION:

ARCHITECT:

CONTRACTOR:

JOB NO:

AGENT:

ORDER NO:

DATE: 9/14/2023

REVISIONS:

DWG NO: FL